
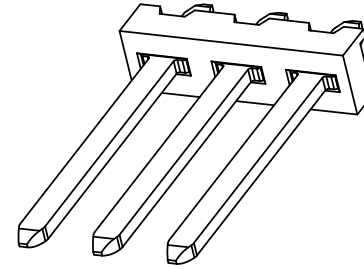
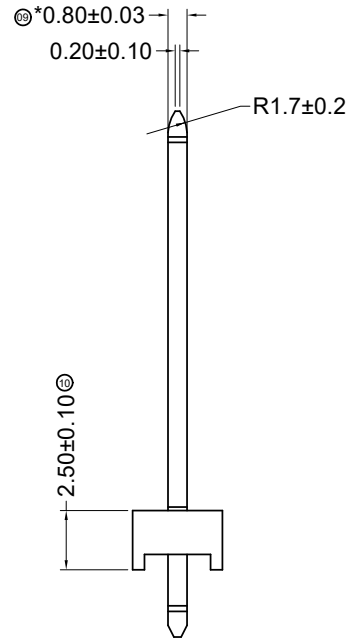
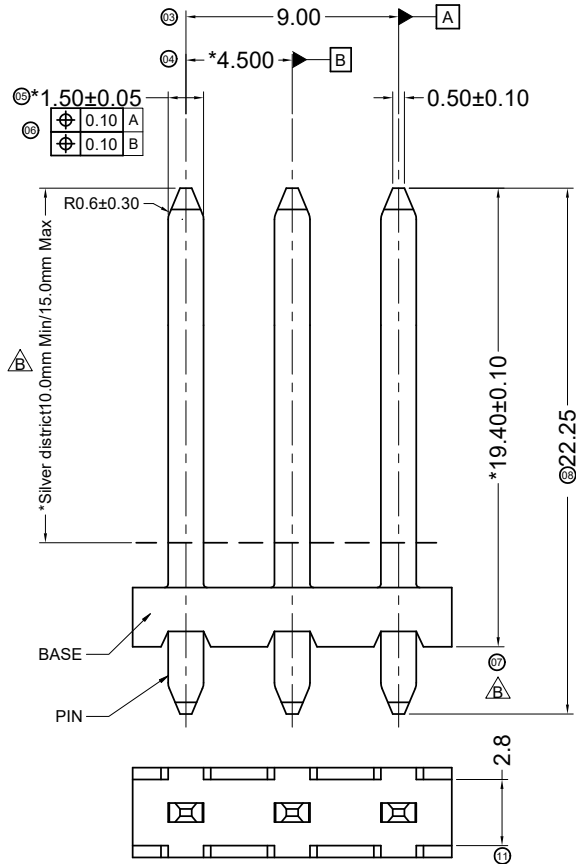


RoHS

This products can apply to the HRS Doc NO. QA-3-04-005 of Environmental&Material Management Rules

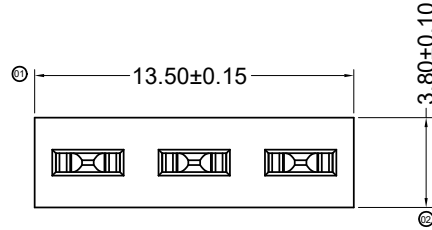

- 1、 ELECTRICAL PROPERTIES:
CURRENT CARRYING CAPACITY: 600 mA
- 2、 MECHANICAL PROPERTIES:
PIN PUSHOUT FORCE FROM PLASTIC SOCKET: >=20 N
- 3、 TEMPERATURE PROPERTIES:
REQUIRED TEMPERATURE WHILE SOLDERING: 270°C FOR 10 SECONDS
OPERATING TEMPERATURE RANGE: -40°C TO 130°C
- 4、 MATERIAL:
BASE: PA4T 94V-0 BLACK
PIN: BRASS 0.80*1.50mm
- 5、 PLATING:
UNDERPLATE: 40u" MIN NICKEL
CONTACT AREA TOPPLATE: 40u" MIN SILVER
80u"MIN MATTE TIN ON SOLDER TAIL

HRS-4500 W V X- 03 X - 4T S40 BK X
 ①②③④⑤⑥⑦⑧⑨⑩

- ① Series No
- ② Category: W-Wafer
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: Dip-Blank
- ⑤ Row No.-Pin No: 03- 03Pin
- ⑥ Special No: Blank
- ⑦ Material: 4T-PA4T 94V-0;
- ⑧ Plating Category:: S40-Plating Silver 40u" Min
- ⑨ Color : BK-Black
- ⑩ Packag: R-Reel 、 T-Tary

					GENERAL TOLERANCE		Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-4500WV-03-4TS40BKT				
					.X ±0.30						TITLE				
					.XX ±0.20		APPROVAL				Pin Header 3Pins 180° connectors				
					.XXX ±0.10		Smark				UNIT				
					X° ±2°		Joshua				SCALE				
					PROJECT		Alan_qin				SHEET				
							2017/08/07				REV				
											NUMBER				
											mm				
											1:1				
											1/1				
											A				
											A-000				

2018/06/19 B EN20180619003 07号尺寸由19.40±0.15mm 更改为19.40±0.10mm Alan_qin Smark

DATE REV ECN NO DESCRIPTION MODIFY APPROVAL PROJECT APPROVAL CHECK DRAWN DATE

1 2 3 4 5 6 7 8